

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>4</sup> : <b>A61F 2/06</b>	<b>A2</b>	(11) International Publication Number: <b>WO 88/ 06026</b> (43) International Publication Date: 25 August 1988 (25.08.88)
<p>(21) International Application Number: PCT/EP88/00115</p> <p>(22) International Filing Date: 17 February 1988 (17.02.88)</p> <p>(31) Priority Application Number: 19405 A/87</p> <p>(32) Priority Date: 17 February 1987 (17.02.87)</p> <p>(33) Priority Country: IT</p> <p>(71)(72) Applicant and Inventor: ARPESANI, Alberto [IT/IT]; Piazza S. Angelo, 1, I-20121 Milano (IT).</p> <p>(74) Agent: RAPISARDI, Mariacristina; Studio Tecnico Legale Rapisardi, Largo V Alpini 15, I-20145 Milano (IT).</p> <p>(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.</p>		<p><b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i></p>

(54) Title: INTERNAL PROSTHESIS FOR THE SUBSTITUTION OF A PART OF THE HUMAN BODY PARTICULARLY IN VASCULAR SURGERY

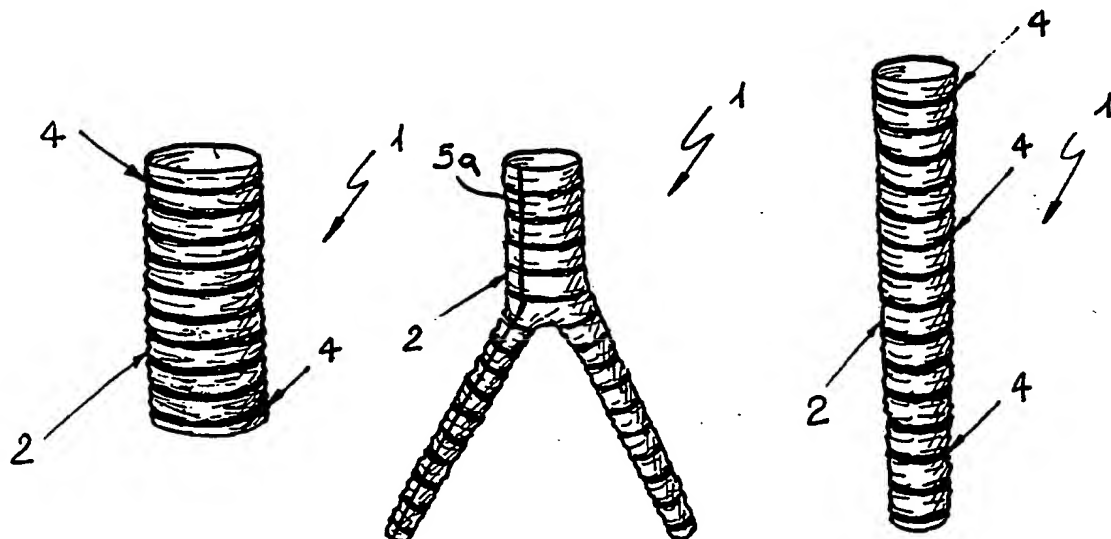

(57) Abstract

Internal prosthesis for the substitution of a part of the human body particularly in vascular surgery, which has a body (2) with a substantially tubular configuration, made of plastic material tolerated by the human body and suitable for being associated by its free ends, through a suture, to the ends of one or more arteries; advantageously the body defining the prosthesis is radiopaque so that it can be easily detected by means of an X-ray apparatus.

Best Available Copy

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
AU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	IT	Italy	NO	Norway
BJ	Benin	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland				

INTERNAL PROSTHESIS FOR THE SUBSTITUTION OF A PART OF THE  
HUMAN BODY PARTICULARLY IN VASCULAR SURGERY.

Technical field:

This invention relates to an internal prosthesis for the  
substitution of a part of the human body, particularly in  
vascular surgery.

Background Art:

As it is known, vascular surgery together with orthopedic  
surgery is the one which mostly profited by the introduction  
of prosthetic materials.

The first substitutions of arterial trunci go back to few  
decades ago, when the homologous graft technique was  
introduced, i.e. the substitution of the injured or ill part  
with a similar segment taken from a corpse.

Preserved human arteries had been for many years the  
substitutive material of choice; however, the difficulties  
related to the timely finding of arterial parts of special  
size and shape, the need to depend on "arteries banks", and  
the frequent technical problems related to anastomosis  
caused a gradual reduction in the field of their application  
when substitutive plastic materials were introduced on the  
market.

The ideal material for vascular prosthesis should include  
essentially the following features: it should not have any  
toxic, allergic or carcinogenic action, it should be

logically inert, i.e. it should be well tolerated by the host organism, it should have a high degree of elasticity, a good porosity and high permeability to migrating cells.

The last quality is absolutely necessary so that the host  
5 fibroblasts can penetrate the thickness of the prosthesis wall by fixing the same to the surrounding tissues.

Similarly, inside the channel, the cells coming from the blood can adhere to the surface and form a layer defined as neointima.

10 Furthermore, it is necessary that the prosthesis material can be submitted to the various sterilization procedures without losing its properties and that it can be also easily shaped by means of scissors.

Sometimes it happens that, after a shorter o longer period  
15 of time, the prosthesis detaches in the suture thus causing the formation of a scar tissue that by collapsing due to the blood pressure causes a pseudoaneurism and causes the prosthesis end to come off the artery end to which it was associated.

20 In this type of pathology, a layer of expanded scar tissue forms around the prosthesis, thereby the arterial blood laminar flow becomes vortical thus causing a thrombi stratification within the scar tissue itself, which may be a risk for the patient.

25 Currently, the sole analysis techniques available to

cular surgeons in order to detect the prosthesis detachment in the suture are x-ray, echography, angiography, i.e. blood column detection, or more recently C.A.T. (Computerized Axial Tomography) and N.M.R. (Nuclear Magnetic Resonance).

- 5 In the case of angiography, the detection of the blood column does not always allow the pathology to be detected, by x-ray the evidence of pathology is almost impossible as the prostheses currently available on the market are not radiopaque; on the contrary, by C.A.T. or N.M.R. and by  
10 echography a section detection of the pathology is possible even if it is very difficult to detect and quantify any displacement of the prosthesis end from the artery end.

Disclosure of the invention:

- The main object of this invention is to overcome the above-mentioned drawbacks by making an internal prosthesis  
15 for the substitution of a part of the human body particularly in vascular surgery, which allows the detection of its positioning by means of a simple x-ray apparatus.

- Within this scope of the invention, a relevant object of the invention is to design a prosthesis allowing the detection  
20 and the quantification of its displacement from the artery to which it was connected.

Another object of the invention is to make a prosthesis which, even if it allows an easier detection, has the same functional properties of the current prostheses.

e above and other objects are fulfilled by means of an internal prosthesis for the substitution of a part of the human body particularly in vascular surgery, having a body with a substantially tubular configuration of plastic material well-tolerated by the human body and being suitable for being associated by its free ends, by means of a cross or oblique suture, to the ends of one or more arteries, characterized in that said body is radiopaque and/or in that said body has radiopaque surface portions developing without discontinuity over its entire surface.

Brief description of the drawing:

Further features and advantages of the invention will be better understood from the description of a preferential embodiment, which is merely illustrative, of the prosthesis in accordance with the invention, shown by way of example and not limited thereto in the enclosed drawings in which:

- Fig.1 shows the various configurations that the prosthesis of the invention may have;
- Fig.2 is a schematic view of the prosthesis suture with an artery according to the well-known technique;
- Fig.3 shows the pathology determined by the detachment of the prosthesis from the artery; and
- Fig.4 shows a variant of the pathology shown in Fig.3.

Ways of carrying out the invention:

With particular reference to the above-mentioned Figures,

the prosthesis in accordance with the invention, globally referred to under the reference number 1, has a body, generally referred to as 2, which generally is made of plastic material tolerated by the human body such as some acrylic resins and some ethylene polymers.

Suitably, according to the type of vascular surgery to be performed, the body 2 has different configurations that are all substantially tubular and that in particular might be also cylindrical, "Y"-shaped, or tapered, as shown by way of example in Figure 1, and that are able to possess among the basic requirements a high degree of elasticity, a good porosity and enough permeability to migrating cells.

Advantageously, in accordance with the invention, the body 2 is also radiopaque so that the vascular surgeon can accurately determine its position relatively to one or more ends 3 of the arteries by means of an x-ray apparatus of standard type and/or while making the angiography.

More in details, the body 2, defining the prosthesis, can be for instance made radiopaque, as we already said, by means of a suitable processing or by coating or inserting in its wall a radiopaque fabric.

In a preferred embodiment, but not limited thereto, the body 2 has radiopaque surface portions developing without discontinuity over its entire surface, more precisely said radiopaque portions, generally referred to as 7, show an

annular development and are preferably but not necessarily defined for example by a filiform element 5 or by a fabric having radiopacity properties.

Suitably, the radiopaque portions 4 are reciprocally  
5 equidistant and parallel along the entire development of the body 2 so that the detection of the existing type of pathology can be extremely easy thus allowing the carrying on of any further investigation and of the treatment, if any.

10 As the prosthesis relatively to the end of the artery or arteries can show a total or partial detachment, as shown for example in Figure 4, causing a pseudoaneurism due to the coming off of the ends of the artery and of the prosthesis, such coming off being filled by an expanded scar tissue  
15 that is not blood-pressure resistant, as it is shown for example in Figure 3, the parallelism and equidistance of the radiopaque portions having an annular development along the entire body 2 allow to determine accurately in which of the above-mentioned cases the prosthesis is relatively to the  
20 artery and therefore allow the vascular surgeon to act accordingly.

Advantageously, the radiopaque portions have the same functional properties of the body 2 so that the special nature of the prosthesis is not altered; moreover, the  
25 radiopaque portions are sensorially perceptible and more



precisely they are visible to the naked eye so to make the surgeon's task easier during vascular surgery, i.e. during the execution of the anastomosis at the level of one of the radiopaque rings.

5 Finally, the radiopaque portions can also have a stain different from the stain of the body 2 and/or from each other in order to better stand out on the same.

Furthermore, it shall be specified that beside the radiopaque portions having an annular development, the body  
10 2 can have a filiform element 5a extending along the longitudinal development of the body 2 and its branches.

The operation of the prosthesis in accordance with the invention is evident from what has been described and illustrated herein; in particular, it can be specified that  
15 during vascular surgery the surgeon will cut, according to the needs, a prosthesis length just close to one of the radiopaque portions with annular development so that the latter is at the connection with the artery end and allows later the accurate detection of the connection between  
20 artery and prosthesis.

In practice, it has been noticed that the prosthesis in accordance with the invention turns out to be extremely advantageous as it allows, by means of a simple x-ray apparatus now existing in all hospital centers, its  
25 detection and correct positioning relatively to the artery

to which it was previously connected.

The invention as herein disclosed is subject to many variations and changes all within the scope of the invention; moreover, all details can be replaced by

5 technically equivalent elements.

In practice, all the materials used as well as the size can be of any type according to the needs and to the state of the art.

Claims:

1 1.- Internal prosthesis for the substitution of a part of  
2 the human body particularly in vascular surgery having a  
3 body with a substantially tubular configuration of plastic  
4 material tolerated by the human body and suitable for being  
5 associated by its free ends, by cross or oblique suture, to  
6 the ends of one or more arteries, characterized in that said  
7 body is radiopaque.

1 2.- Internal prosthesis for the substitution of a part of  
2 the human body particularly in vascular surgery having a  
3 body with a substantially tubular configuration of plastic  
4 material tolerated by the human body and suitable for being  
5 associated by its free ends, by suture, to the ends of one  
6 or more arteries, characterized in that said body has  
7 radiopaque surface portions developing without discontinuity  
8 over its entire surface.

1 3.- Prosthesis according to claims 1 and 2, characterized  
2 in that said radiopaque portions are defined by a filiform  
3 element.

1 4.- Prosthesis according to claims 1 and 2, characterized  
2 in that said radiopaque portions are defined by a fabric.

1 5.- Prosthesis according to one or more of the preceding  
2 claims, characterized in that said radiopaque portions have  
3 an annular development.

1 6.- Prosthesis according to one or more of the preceding



2 claims, characterized in that said radiopaque portions are  
3 reciprocally equidistant and parallel along the entire  
4 development of said body.

1 7.- Prosthesis according to one or more of the preceding  
2 claims, characterized in that said radiopaque portions have  
3 the same functional properties of said body.


1 8.- Prosthesis according to one or more of the preceding  
2 claims, characterized in that said radiopaque portions are  
3 sensorially perceptible.

1 9.- Prosthesis according to one or more of the preceding  
2 claims, characterized in that said radiopaque portions have  
3 a stain different from the stain of said body and/or from  
4 each other.


**Fig.1**

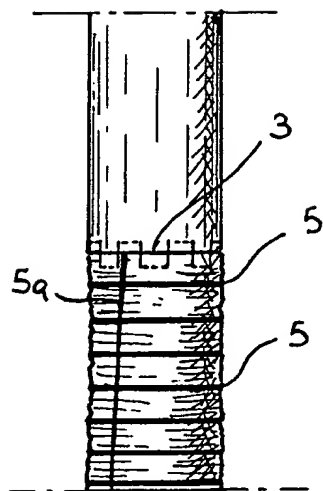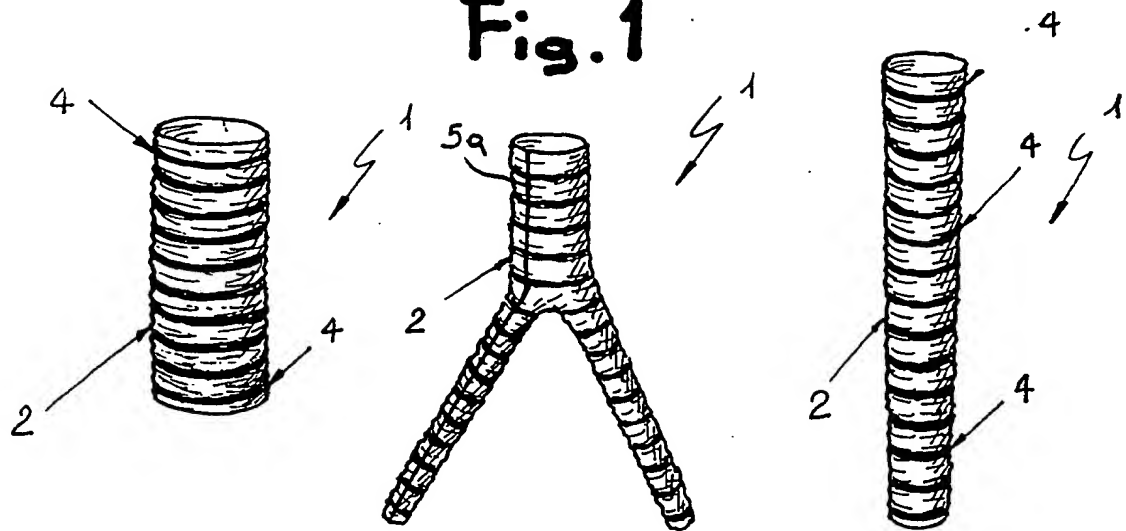

**Fig.2**

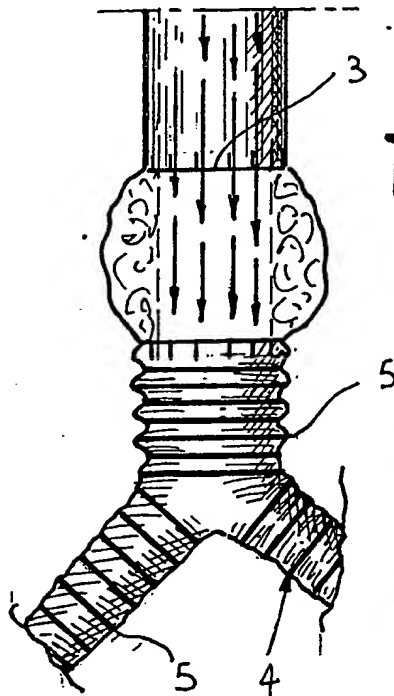

**Fig.3**

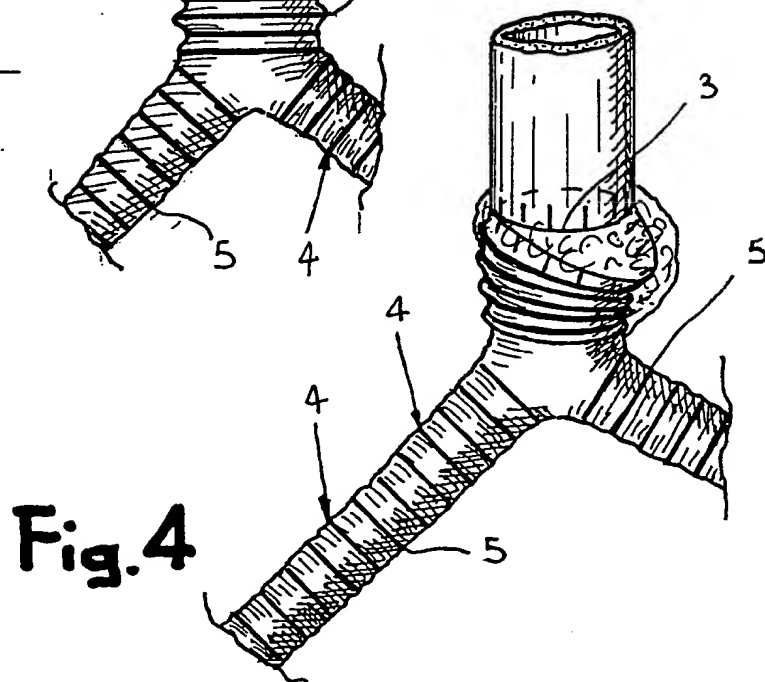

**Fig.4**

**THIS PAGE BLANK (USPTO)**